

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 20 TOWNSHIP 15 RANGE 4

DATE: 5-11-02 8-9-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison




METHOD OF ESTABLISHMENT: County: 11-8-97

IN. S.P.C. E ZONE NAD '83

NAME: 15042004

N: 497690.9552(m)

E: 61064.2186(m)

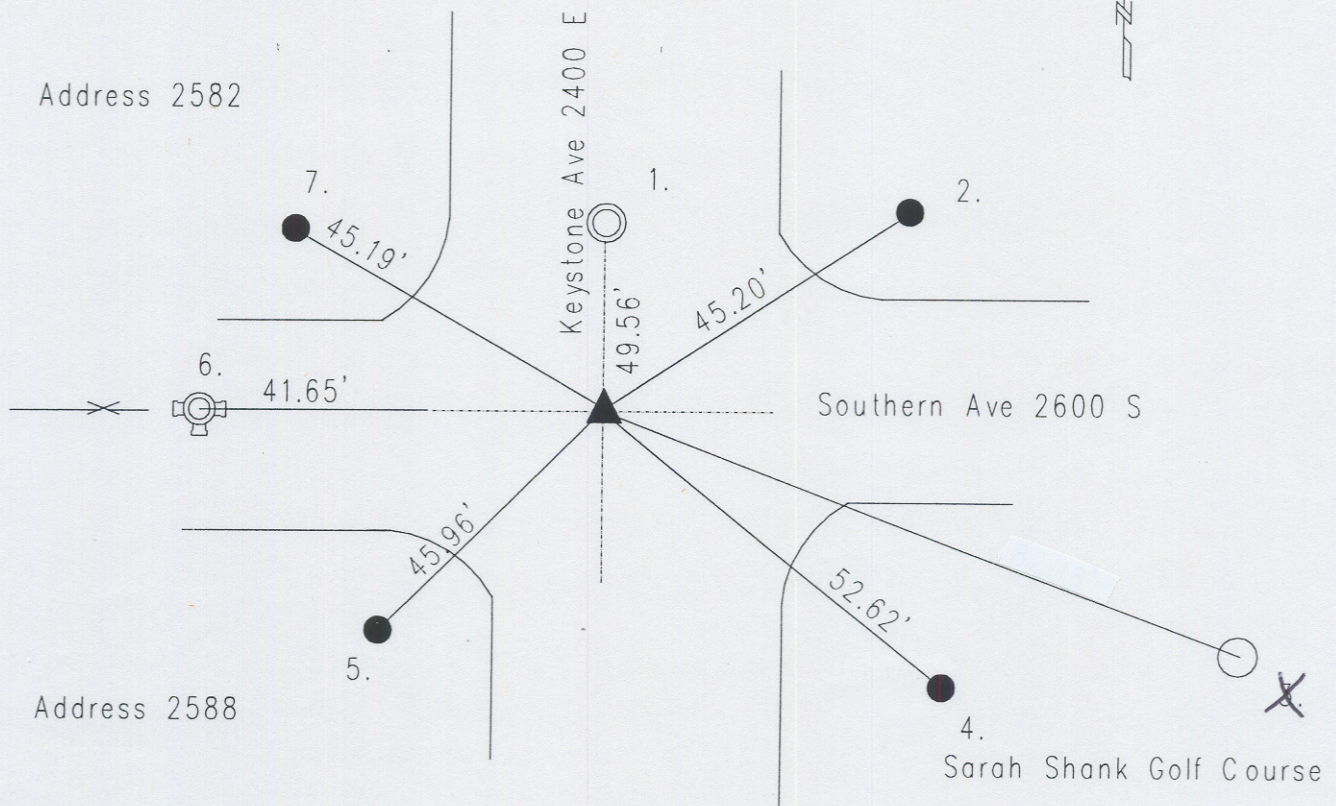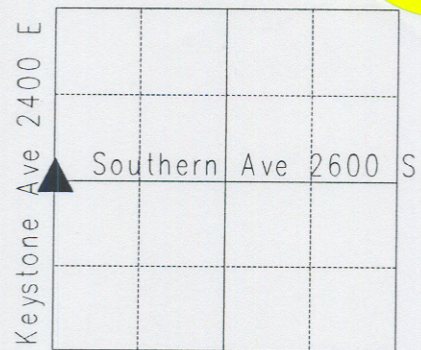

Original post set 1820 by Hendricks with witnesses: 18" elm N 26 W 3 links; 15" beech N 21 links per Marion County Atlas pg. 10. Hosbrook 6-27-1855 called both original witnesses per Center Township Legal Survey Book pg. 37. Bruer 10-18-79 called 5/8" rebar with cap. wilcoxon 7-23-96 called rebar. Excavated by wilcoxon 11-8-97 no stone found. Set Harrison. Re-tied 5-11-02 by Wilcoxon. 15042004

REF.	DISTANCE	DESCRIPTION
1.	49.56'	Due N to Cut 'x' in S-side of manhole rim
2.	45.20'	Mag nail in curb seam
3.	82.18'	Cut 'x' corner fence post 40" up
4.	52.62'	Mag nail in curb seam
5.	45.96'	Mag nail in curb seam
6.	41.65'	Top nut of fire hydrant
7.	45.19'	Mag nail in curb seam